VentAHood


VALL-MOUNT RANGE HOOD

PREMIUM STAINLESS STEEL HOOD

comes with mirrored stainless steel lip treatment on all sides and a pair of 2" vertical bands in mirrored stainless steel attached with laminate.


AVAILABLE MODELS

JDH/C2 Model	Width	CFM
JDH236/C2-SS/AS-MSS	36"	600
JDH348/C2-SS/AS-MSS	48"	900



QUIET AND POWERFUL





EFFICIENT

LIFETIME WARRANTY MAGIC LUNG BLOWER

LIFETIME WARRANTY

P: 800-292-8374 • F: 800-574-8805 www.pinnaclesalesgroup.com

Vent A Hood

Vent A Hood

AVERY WALL-MOUNT RANGE HOOD





AVAILABLE MODELS

JDH/C2 Model	Width	CFM	Duct	
JDH236/C2-SS/AS-MSS	36"	600	8"	
JDH348/C2-SS/AS-MSS	48"	900	6" & 8"	


DUCT COVERS

Model	Width	Height	CLG.
WDCRND-18/12/JDH/C2/AS-MSS	18"	12"	9'
WDCRND-18/24/JDH/C2/AS-MSS	18"	24"	10'
WDCRND-30/12/JDH/C2/AS-MSS	30"	12"	9'
WDCRND-30/24/JDH/C2/AS-MSS	30"	24"	10'



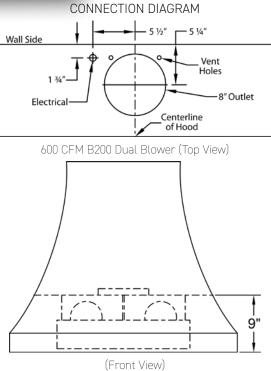

RECOMMENDED MOUNTING HEIGHT



*Exceeding recommended mounting height may compromise performance.

ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

										Minimum	
					CFM	Equiv.	CFM	CFM	CFM	Round	
Model	Volts	Amps+	Hz	RPM	SP@0.0"	CFM\$	SP@0.1"	SP@0.2"	SP@0.3"	Duct Size	Sones#
B200	115	4.0	60	1550	600	900	531	480	430	8"	6.5
Dual										(50 sq. in.)	

+ This model is equipped with LED lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").

\$ Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM". # Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station. This specification sheet is subject to change without notice.

